

Steel channel grating

Edge anchoring grooves with Sikafloor® PurCem® (width 8 – 18 mm; 2 x screed thickness and depth 8 – 18 mm; 2 x screed thickness)


4-9 mm

Sikaflex® PRO -3 joint with backing rod. Minimum joint width 10 mm. Please refer to the product data sheet of Sikaflex® PRO-3 for further details. Use appropriate surface pre-treatment acc. To the most recent PDS

Sikafloor® PurCem® screed layer

Sikadur®-42 anchorage mortar

Concrete slab

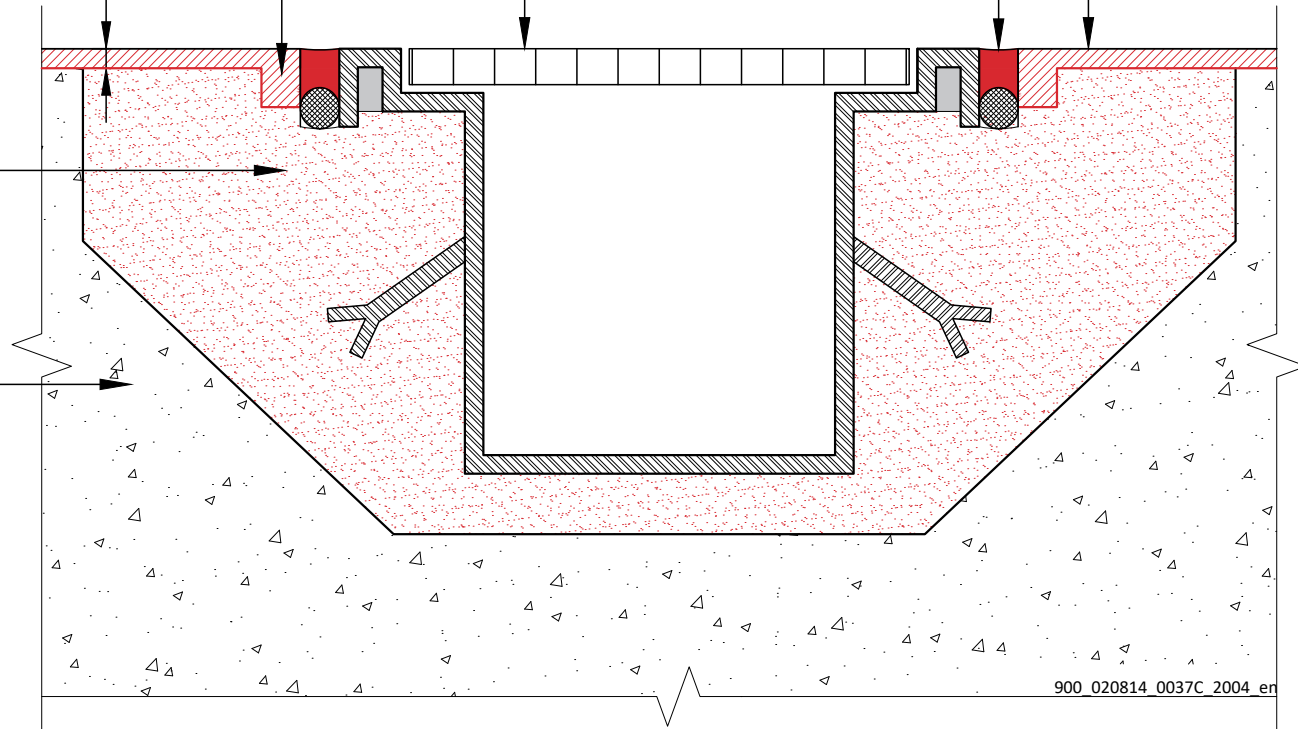

900\_020814\_0037C\_2004\_en

**Sikafloor® PurCem®**  
**Drainage channel detail**

Template for translation. Internal use only

900\_020814\_0037C\_2004\_en  
April 2020

**Sika Services AG**

Tüffenwies 16  
8048 Zürich  
Switzerland

Tel: +41 584364040

www.sika.com

**BUILDING TRUST**



The information contained herein and any other advice are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. The information only applies to the application(s) and product(s) expressly referred to herein and is based on laboratory tests which do not replace practical tests. In case of changes in the parameters of the application, such as changes in substrates etc., or in case of a different application, consult Sika's Technical Service prior to using Sika products. The information contained herein does not relieve the user of the products from testing them for the intended application and purpose. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.