


S-slivnik okomiti PVC — Košara za slivnik

Zavarivanje vrućim zrakom

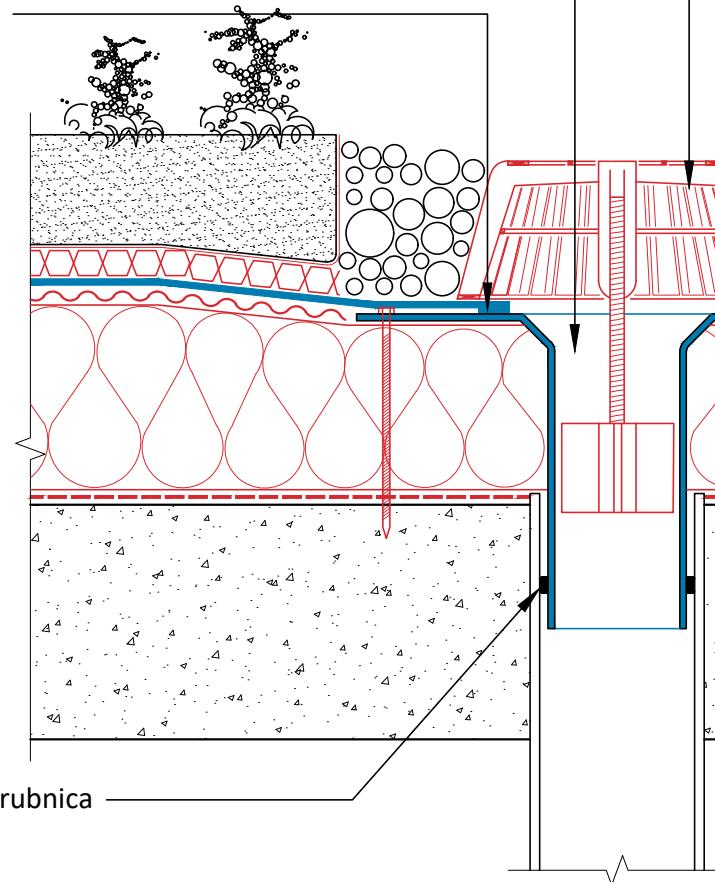

Sikoplan® PVC membrana,
slobodno položena

Tlo sa biljkama min. debljine 150 mm
i težine 170 kg/m²

SikaRoof® Drainage Layer 20L2F
drenažni, filterski i zaštitni sloj

Glassmat G 120 razdjeljni sloj
(po potrebi)

Sikatherm® / Sarnatherm®,
termoizolacija

Sarnavap® parna brana

Kompresijska prirubnica

**SIKAPLAN® PVC - INTENZIVNI ZELENI KROV
NA BETONSKOJ PODLOZI SA TERMOIZOLACIJOM**
SPL PVC - 051.05.01 - Krovni slivnik.

DRAWING MUST ALWAYS BE REVIEWED BY A DESIGN SPECIALIST AND IF NECESSARY MODIFIED TO ENSURE SUITABILITY FOR THE SPECIFIC APPLICATION

The information contained herein and any other advice given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. The information only applies to the application(s) and product(s) expressly referred to herein and is based on laboratory tests which do not replace practical tests. In case of changes in the parameters of the application, such as changes in substrates etc., or in case of a different application, consult Sika's Technical Service prior to using Sika products. The information contained herein does not relieve the user of the products from testing them for the intended application and purpose. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

Sika BH d.o.o.
Džemala Bijedića 299
71000 Sarajevo
Bosna i Hercegovina
Tel: +38733 788 390
www.sika.ba

BUILDING TRUST

