

Sikaplan® PVC
slobodno položena membrana


Tlo sa biljkama min. debljine
150 mm i težine 170 kg/m²

SikaRoof® Drainage Layer 20L2F
drenania, filterski and zaštitni sloj


Glassmat G 120 razdjelni sloj
(po potrebi)

Sikatherm® / Sarnatherm®,
termoizolacija

Sarnavap® parna brana

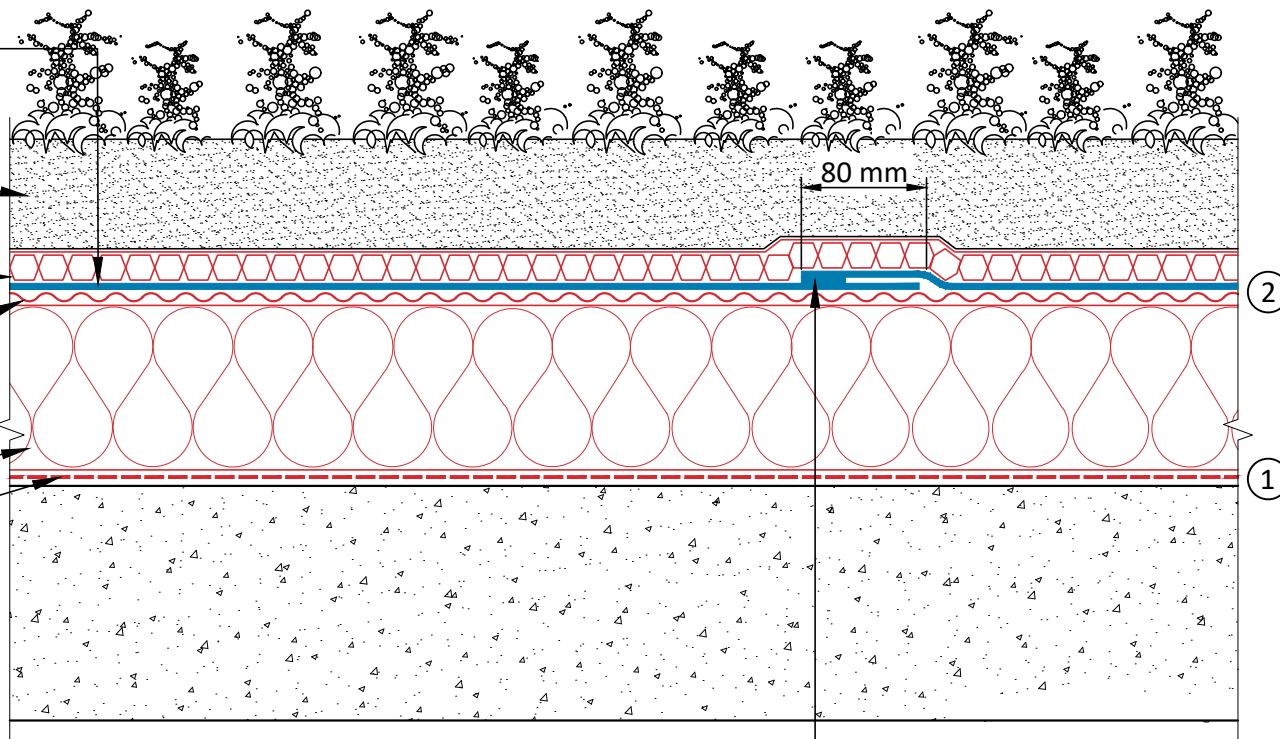

Sarnabar® pričvršćivanje po obimu



Sarnabar®

S-PVC uže za zavarivanje

Sarnafast® vijak

Zavarivanje vrućim zrakom

Sva opšivanja, završeci i prodori širi od 500 mm moraju
biti mehanički osigurani korištenjem Sarnabar® šine.

SIKAPLAN® PVC - INTENZIVNI ZELENİ KROV
NA BETONSKOJ PODLOZI SA TERMOIZOLACIJOM
SPL PVC - 051.00.01 - Sistem build-up

DRAWING MUST ALWAYS BE REVIEWED BY A DESIGN SPECIALIST AND IF NECESSARY MODIFIED TO ENSURE SUITABILITY FOR THE SPECIFIC APPLICATION

The information contained herein and any other advice are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. The information only applies to the application(s) and product(s) expressly referred to herein and is based on laboratory tests which do not replace practical tests. In case of changes in the parameters of the application, such as changes in substrates etc., or in case of a different application, consult Sika's Technical Service prior to using Sika products. The information contained herein does not relieve the user of the products from testing them for the intended application and purpose. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

Sika BH d.o.o.

Džemala Bijedića 299

71000 Sarajevo

Bosna i Hercegovina

Tel: +38733 788 390

www.sika.ba

BUILDING TRUST

