

Košara/Hvatač lišća

Odgovarajući S-Felt niveliрајуći sloj  
(po potrebi)

Sikaplan® PVC membrana,  
mehanički pričvršćena

Sarnaplast®-2235 ili Sikaflex®-11 FC zaptivna masa  
sa potpornim užetim i odgovarajućim prajmerom

S-Scupper PVC,  
odvodnja kroz parapetni zid

Sarnavap® ljepljiva traka

Zavarivanje vrućim zrakom

Tlo sa biljkama min. debljine 150 mm  
i težine 170 kg/m<sup>2</sup>


SikaRoof® Drainage Layer 20L2F  
drenažni, filterski i zaštitni sloj

Sikaplan® PVC membrana,  
slobodno položena

Glassmat G 120 razdjeljni sloj  
(po potrebi)

Sikatherm® / Sarnatherm®,  
termoizolacija

Sarnavap® parna brana

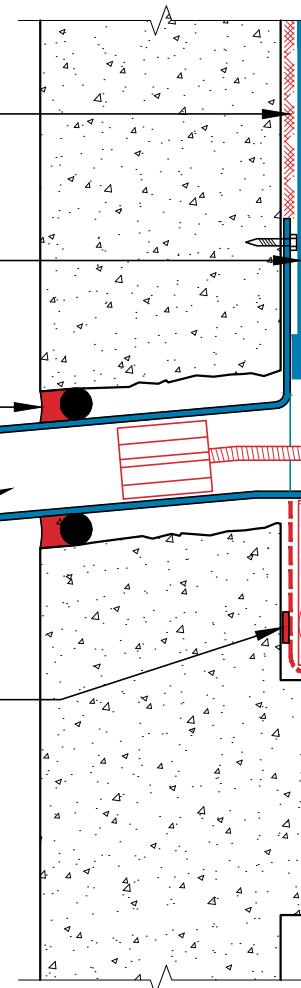

## SIKAPLAN® PVC - INTENZIVNI ZELENI KROV NA BETONSKOJ PODLOZI SA TERMOIZOLACIJOM

SPL PVC - 051.06.01 - Zidni sливник

DRAWING MUST ALWAYS BE REVIEWED BY A DESIGN SPECIALIST AND IF NECESSARY MODIFIED TO ENSURE SUITABILITY FOR THE SPECIFIC APPLICATION

The information contained herein and any other advice given is in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. The information only applies to the application(s) and product(s) expressly referred to herein and is based on laboratory tests which do not replace practical tests. In case of changes in the parameters of the application, such as changes in substrates etc., or in case of a different application, consult Sika's Technical Service prior to using Sika products. The information contained herein does not relieve the user of the products from testing them for the intended application and purpose. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

Sika BH d.o.o.  
Džemala Bijedića 299  
71000 Sarajevo  
Bosna i Hercegovina  
Tel: +38733 788 390  
[www.sika.ba](http://www.sika.ba)

BUILDING TRUST

